



TUTTI - ALL

160/15  
180/18  
200/15  
200/21





# MODULA PLUS





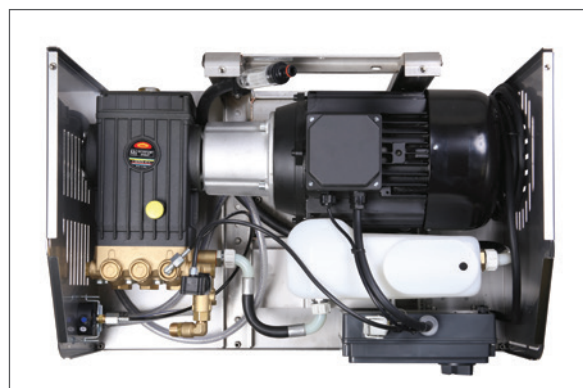

IDROPULTRICI STAZIONARIE PROFESSIONALI AD ACQUA FREDDA  
PROFESSIONAL STATIONARY COLD WATER HIGH PRESSURE CLEANERS

## MODULA PLUS - IDROPULITRICI STAZIONARIE PROFESSIONALI AD ACQUA FREDDA




- Struttura chiusa e realizzata in acciaio inox AISI 304
  - Pompe a bielle con pistoni in ceramica, testata in ottone e guarnizioni per alta temperatura
  - Motore 1450 rpm
  - Protezione termica del motore
  - Motore ad alto rendimento
  - Trasmissione con giunto flessibile (FJ)
  - Controllo macchina ACDS
  - Controllo perdite
  - Spegnimento automatico per mancanza d'uso dopo 20 min
  - Led segnalazione «macchina pronta» e «anomalia»
  - Memorizzazione del tempo di utilizzo della macchina con segnalazione led al raggiungimento del periodo di manutenzione programmata
  - Pistola con giunto girevole in alta pressione (swivel) e prolunga atermica
  - Erogazione detergente in alta pressione con rubinetto
  - Vaschetta per l'acqua di alimentazione con rubinetto galleggiante e controllo mancanza acqua
  - Manometro
  - Tubo alta pressione da mt 15 antimacchia (grigio)
  - Predisposizione per staffa aggancio rapido a muro (optional)
  - Predisposizione per controllo remoto (optional)
  - Predisposizione per avvolgitubo (optional)
- *Enclosed frame constructed in stainless steel AISI 304*
  - *Triplex plunger pump with three brass head and high temperature seals*
  - *1450 rpm motor*
  - *High efficiency motor*
  - *Motor thermal protection*
  - *Motor/pump equipped with flexible joint (FJ)*
  - *(ACDS) Advanced Control Delayed Stop*
  - *High pressure swivel gun with heat proof extension*
  - *Micro leakage control*
  - *Automatic shutdown if idle for more than 20 min*
  - *Warning led "machine ready" and "malfunction"*
  - *Hour counter device with service alert warning led*
  - *High pressure detergent injection system*
  - *Built-in water tank with floating valve*
  - *Pressure gauge*
  - *15 m non-marking high pressure hose (grey)*
  - *Predisposed for optional quick hook-up wall bracket*
  - *Predisposed for optional with remote control*
  - *Hose reel (optional)*





## ACCESSORI IN DOTAZIONE / SUPPLIED ACCESSORIES


		N°	MOD.	COD.	DESCRIZIONE - DESCRIPTION
1		1	MODULA HD 160-180-200	01AC422	Semilancia con Pistola M22 swivel Semilance with trigger in M22 swivel
2		2	Tutti-All	01AC402	Lancia - Lance l=70 cm in M22 out 1/4"F
3		3	130/10	I50276	Ugello 1/4 25035
		3	200/15	I50284	Ugello 1/4 25045
		3	160/15	I50216	Ugello 1/4 2505
		3	180/18	I50307	Ugello 1/4 2506
		3	200/21	I50295	Ugello 1/4 25065
4		4	MODULA 130-150/15	01AC398	Tubo AP R1 5/16-15mt-M22 grigio H.P. hose R1 5/16-15m-M22 grey
		4	MODULA 180-200	01AC425	Tubo AP R2 5/16-15 mt-M22 grigio H.P. hose R2 5/16-15 m-M22 grey
5		5	Tutti-All	B.RCVR00170	Portagomma innesto rapido 1/2 Hose connector
6		6	Tutti-All	B.RCVR00169	Preso Portagomma 3/4 - Threaded tap adaptor
7		7	Tutti-All		Chiave - Key

## ACCESSORI A RICHIESTA/ ACCESSORIES ON DEMAND

AVVOLGITUBO HOSE REEL	KIT UGELLO ROTANTE TURBO TURBO NOZZLE KIT	CONTROLLO REMOTO REMOTE CONTROL
 <p>Avvolgitubo alta pressione inox 30 mt Stainless steel high pressure hose reel Cod. 01AC443</p>	 <p><b>Mod.</b> Tutti-All Lancia-Lance (70 cm) <b>Cod.</b> 01AC204</p>	 <p><b>Mod.</b> Modula HD kit controllo remoto con 15 mt di cavo Remote control kit with cable l= 15 mt <b>Cod.</b> 01AC441</p>
	<p><b>Mod.</b> 160/15 Ugello-Nozzle (05) <b>Cod.</b> 01AC296</p>	
	<p><b>Mod.</b> 130/10 Ugello-Nozzle (035) <b>Cod.</b> 01AC293</p>	
	<p><b>Mod.</b> 200/15 Ugello-Nozzle (045) <b>Cod.</b> 01AC295</p>	
	<p><b>Mod.</b> 180/18 - 200/21 Ugello-Nozzle (065) <b>Cod.</b> 01AC297</p>	

# MODULA PLUS - IDROPULITRICI STAZIONARIE PROFESSIONALI AD ACQUA FREDDA PROFESSIONAL STATIONARY COLD WATER HIGH PRESSURE CLEANERS

PIEDINI ANTIVIBRANTI RUBBER FEET	SUPPORTI SUPPORTS
	
Piedini antivibranti per installazione a terra o su ripano Rubber feet for shelf or floor installation Cod. KTSP00013	<b>Mod. Modula HD</b> supporto inox - stainless-steel support Cod. 01AC446
	<b>Mod. Modula HD</b> ripiano inox - stainless-steel shelf Cod. CRDS00815
	<b>Mod. Tutti - All</b> piastra aggancio rapido - bracket for quick mounting Cod. CRDS00814

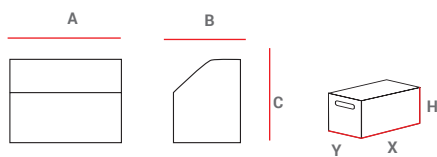

MOD	PESI E DIMENSIONI MACCHINA WEIGHTS AND DIMENSIONS MACHINE			IMBALLO PACKAGING				
	A	B	C	Netto/Net	X	Y	H	Lordo/Gross
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
MODULA PLUS 130/10	720	460	360	65	790	530	610	76
MODULA PLUS 160/15	720	460	360	69	790	530	610	80
MODULA PLUS 180/18	720	460	360	77	790	530	610	88
MODULA PLUS 200/15	720	460	360	77	790	530	610	88
MODULA PLUS 200/21	720	460	360	82	790	530	610	93

		130/10	160/15	180/18	200/15	200/21
codice - code		01PF80	01PF81	01PF82	01PF83	01PF84
pressione mas. - max. pressure	[ bar ] [ MPa - psi ]	130 13-1.880	160 16-2.300	180 18-2.600	200 20-2.900	200 20-2.900
portata mas. - max. flow rate	[ lt/h ]	600	900	1.080	900	1.260
pompa - pump		IP E2	IP 47	IP 47	IP 47	IP 47 N
sistema di arresto - stop system		ACDS	ACDS	ACDS	ACDS	ACDS
rotazione pompa - pump speed	[ rpm ]	1.450	1.450	1.450	1.450	1.450
potenza assorbita - max. absorbed power	[ Kw ]	3	5	7,2	7,2	9,3
alimentazione - supply voltage	[ V - ph - Hz ]	230-1-50	400-3-50	400-3-50	400-3-50	400-3-50
massima temp. aliment. - max. inlet temp.	[ °C ]	40	70	70	70	70